

Расходомеры с круговой шестерней

Технические характеристики

По вопросам продаж и поддержки обращайтесь:


Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

CIRCULAR/SPUR GEAR FLOW M

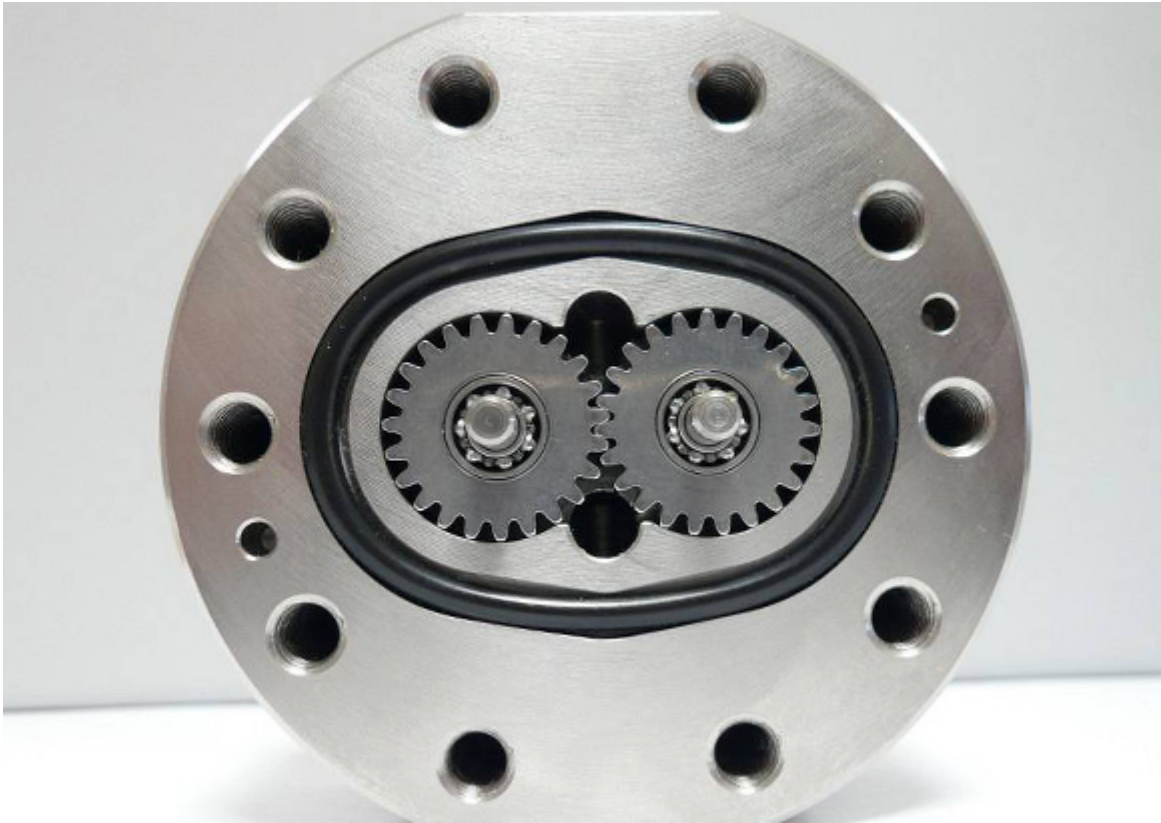

Circular Gear Flow Meter

Function of Circular Gear Flow Meter

1. The measuring gears are driven by the liquid flow on the principle of a gear motor.
2. The gears run without contact in the measuring chamber. The bearing elements are low-friction ball wlain bearings.
3. The movement of the gears is sampled without contact by means of two sensors located in the cover. Between sensor compartment and measuring chamber is located a pressure-resistant, non-magnetic separator plate.
4. When the measuring mechanism rotates by one tooth pitch, the sensor emits a signal which corresponds to 1
5. The signal is converted into a square-wave signal by the preamplifier.
6. The two-channel sampling permits better resolution as well as recognition of the flow direction

Product Characteristics of of Circular Gear Flow Meter

- 1)Optimized for individual applications because the series have been rendered media-specific by means of differing clearances, bearing variants and materials.
- 2)Wide measuring ranges with sizes graduated to meet specific requirements.
- 3)Measurement independent of viscosity within the specified ranges.
- 4)Low pressure drop
- 5)High-response measurement
- 6)High working pressure
- 7)Low noise emission
- 8)High-precision measurement with outstanding reproducibility
- 9)Temperature-independent output signals over a wide temperature range
- 10)High degree of accuracy, even with low flow rates at the bottom end of the measuring range
- 11)High working reliability of the electronics
- 12)Easy to use terminal of the preamplifier
- 13)Working indication of the electronic
- 14)Sensor system and preamplifier in EMC-compatible design
- 15)Explosion-proof version available for all volume counters

Application of Circular Gear Flow Meter

Using condition

gear lubrication,fuel consumption monitor, robot glue dispenser, electrostatic coating equipment, hydraulic leak,diesel injection test bench, Unmanned Aerial Vehicle, two-component system, hydraulic pump tester, polyurethane foaming machine,chip cutting equipment, water treatment, twin-screw extruder, freon Measurement, hot melt dispensing, Gasoline Measurement, Odorant injection, Automotive Engineering and Design, Urethane Flow control etc.

Medium:

Grease, fuel, oil, gasoline, polyurethane,alcohol,water, glue, electrolyte,brake fluid, skydrol,gear oil,offset ink,wax,paint,polyol, isocyanate, adhesives, resin, silicon, clear lacquer, cavity w

PEEK bush special for corrosive condition.

Model	K factor	Flow range	Connection	Accuracy	Gear	Housing
CX-G0.025-P-AL	0.025ml/p	0.008~1 L/min	G1/8	0.5%	SS316L	Anodized aluminium
CX-G0.025-P-SS	0.025ml/p	0.008~1 L/min	G1/8	0.5%	SS316L	SS316L
CX-G0.04-P-AL	0.04ml/p	0.02~2L/min	G1/4	0.5%	SS316L	Anodized aluminium
CX-G0.04-P-SS	0.04ml/p	0.02~2L/min	G1/4	0.5%	SS316L	SS316L
CX-G0.1-P-AL	0.1ml/p	0.04~4L/min	G3/8	0.5%	SS316L	Anodized aluminium
CX-G0.1-P-SS	0.1ml/p	0.04~4L/min	G3/8	0.5%	SS316L	SS316L
CX-G0.2-P-AL	0.245ml/p	0.16~8L/min	G3/8	0.5%	SS316L	Anodized aluminium
CX-G0.2-P-SS	0.245ml/p	0.16~8L/min	G3/8	0.5%	SS316L	SS316L
CX-G0.4-P-AL	0.4ml/p	0.2~20L/min	G1/2	0.5%	SS316L	Anodized aluminium
CX-G0.4-P-SS	0.4ml/p	0.2~20L/min	G1/2	0.5%	SS316L	SS316L
CX-G1-P-AL	1ml/p	0.4~40L/min	G1/2	0.5%	SS316L	Anodized aluminium
CX-G1-P-SS	1ml/p	0.4~40L/min	G1/2	0.5%	SS316L	SS316L
CX-G2-P-AL	2ml/p	1~60L/min	G3/4	0.5%	SS316L	Anodized aluminium
CX-G2-P-SS	2ml/p	1~60L/min	G3/4	0.5%	SS316L	SS316L

Ball bearing special for high speed, wide range condition and universal installation

Model	K factor	Flow range	Connection	Accuracy	Gear	Housing
CX-G0.025-B-AL	0.025ml/p	0.004~2L/min	G1/8	0.5%	SS316L	Anodized aluminium
CX-G0.025-B-SS	0.025ml/p	0.004~2L/min	G1/8	0.5%	SS316L	SS316L
CX-G0.04-B-AL	0.04ml/p	0.01~4L/min	G1/4	0.5%	SS316L	Anodized aluminium
CX-G0.04-B-SS	0.04ml/p	0.01~4L/min	G1/4	0.5%	SS316L	SS316L
CX-G0.1- B -AL	0.1ml/p	0.02~8L/min	G3/8	0.5%	SS316L	Anodized aluminium
CX-G0.1- B -SS	0.1ml/p	0.02~8L/min	G3/8	0.5%	SS316L	SS316L
CX-G0.2- B -AL	0.245ml/p	0.08~16L/min	G3/8	0.5%	SS316L	Anodized aluminium
CX-G0.2- B -SS	0.245ml/p	0.08~16L/min	G3/8	0.5%	SS316L	SS316L
CX-G0.4- B -AL	0.4ml/p	0.1~40L/min	G1/2	0.5%	SS316L	Anodized aluminium
CX-G0.4- B -SS	0.4ml/p	0.1~40L/min	G1/2	0.5%	SS316L	SS316L
CX-G1- B -AL	1ml/p	0.2~80L/min	G1/2	0.5%	SS316L	Anodized aluminium
CX-G1- B -SS	1ml/p	0.2~80L/min	G1/2	0.5%	SS316L	SS316L
CX-G2- B -AL	2ml/p	0.5~120L/min	G3/4	0.5%	SS316L	Anodized aluminium
CX-G2- B -SS	2ml/p	0.5~120L/min	G3/4	0.5%	SS316L	SS316L

Pls note: Customized for High temperature,high pressure, high frequency,bi-direction and special material for Circular Gear Flow Meter.

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93